
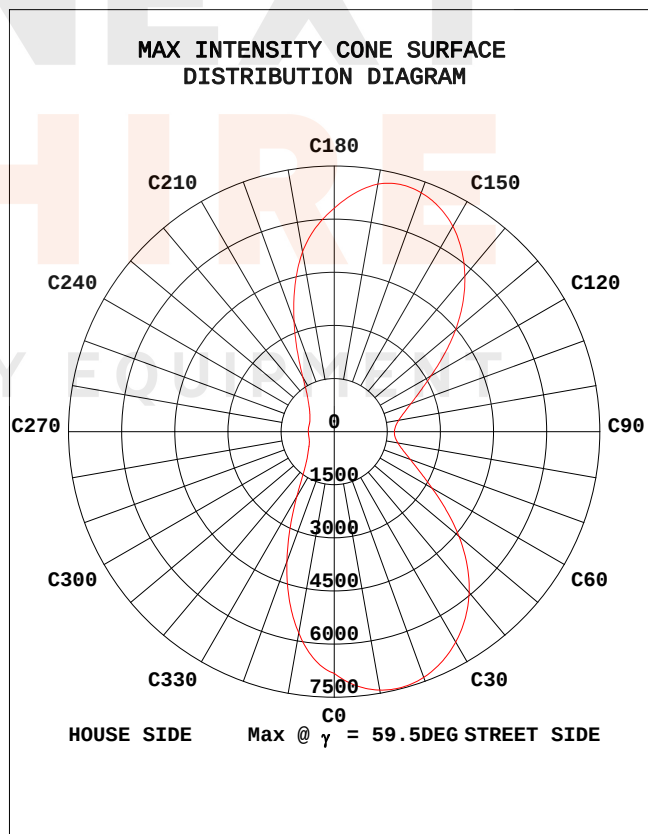


Test:U:45.25V I:2.209A P:99.97W PF:1.000 Freq:0Hz Lamp Flux:16987.6x1 lm		
NAME: All in one solar street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 169.92 lm/W			
MODEL	LRC-H100W	Imax(cd)	7409	η street_up(%)	0.1
NOMINAL POWER(W)	100	LOR(%)	100.0	η street_down(%)	65.8
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	16988	η house_up(%)	0.1
NOMINAL FLUX(lm)	16987.6	MAXIMUM @ (C, γ)	10,59.5	η house_down(%)	34.0
LAMPS INSIDE	1	η up(%)	0.2	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	48	η down(%)	99.8	SLI	22.389

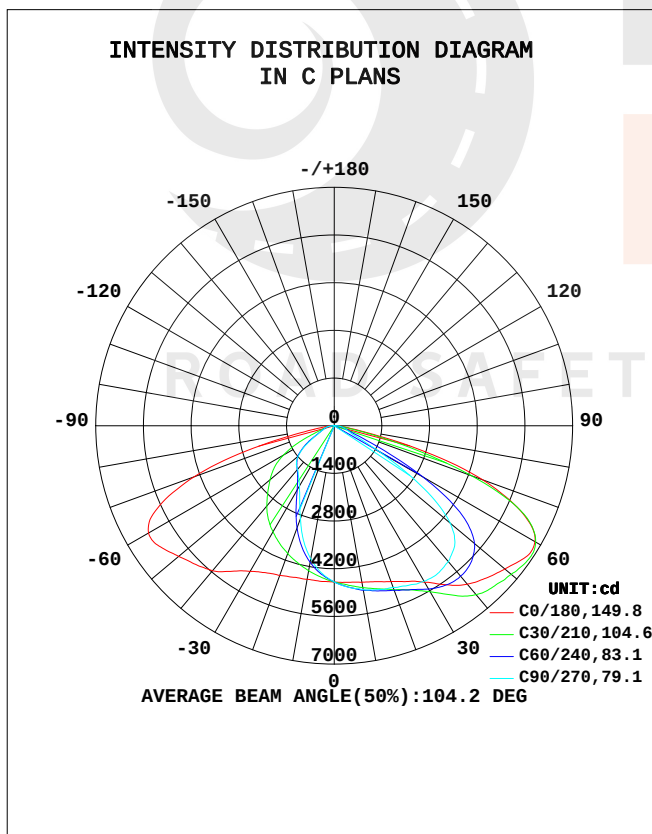


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:Link Chai
Test Date:2022-01-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.0.362
Humidity:60%
Test Distance:26.000m [K=1.4587]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:45.25V I:2.209A P:99.97W PF:1.000 Freq:0Hz Lamp Flux:16987.6x1 lm		
NAME: All in one solar street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

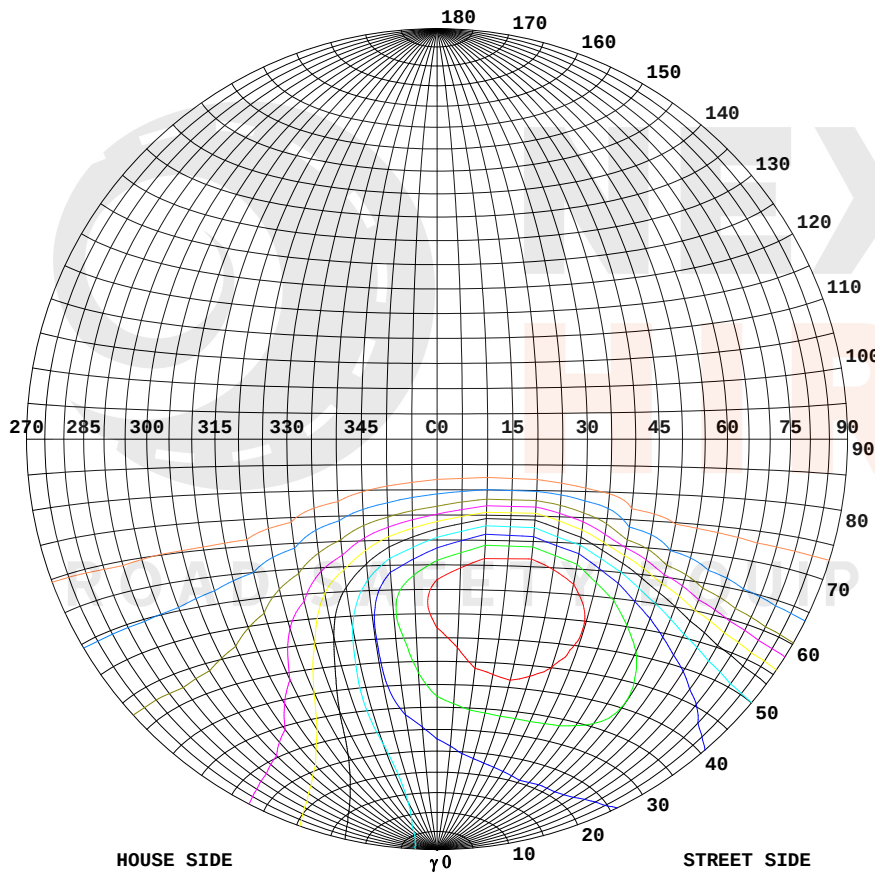

Classification:



IES:Type II - Short
 CIE:Narrow - Short
 IES:Cut-off
 CIE:Semi-cut-off
 Max.At80:45.10cd/klm
 Max.At90:2.213cd/klm
 Max.80-90:45.10cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	7409
90%	6668
80%	5927
70%	5186
60%	4445
50%	3704
40%	2963
30%	2223
20%	1482
10%	741
5%	370

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.9DEG
 Operators:Link Chai
 Test Date:2022-01-19

gamma Range: 0 - 180DEG
 gamma Interval: 0.5DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.0.362
 Humidity:60%
 Test Distance:26.000m [K=1.4587]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE AND ISOLUX DIAGRAM

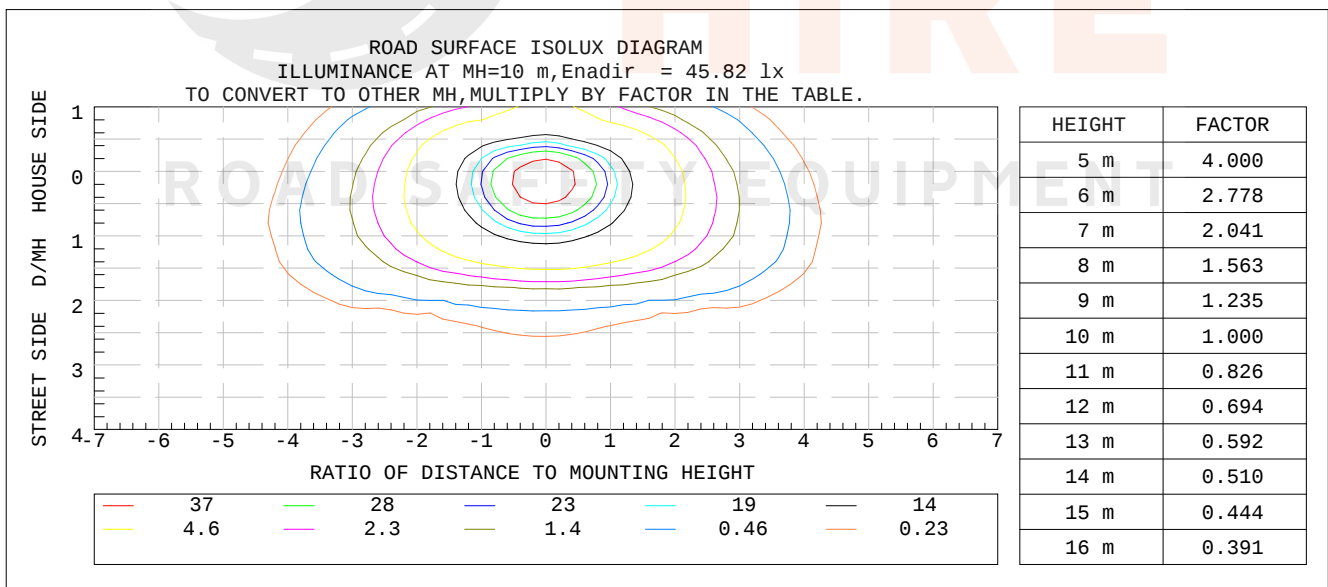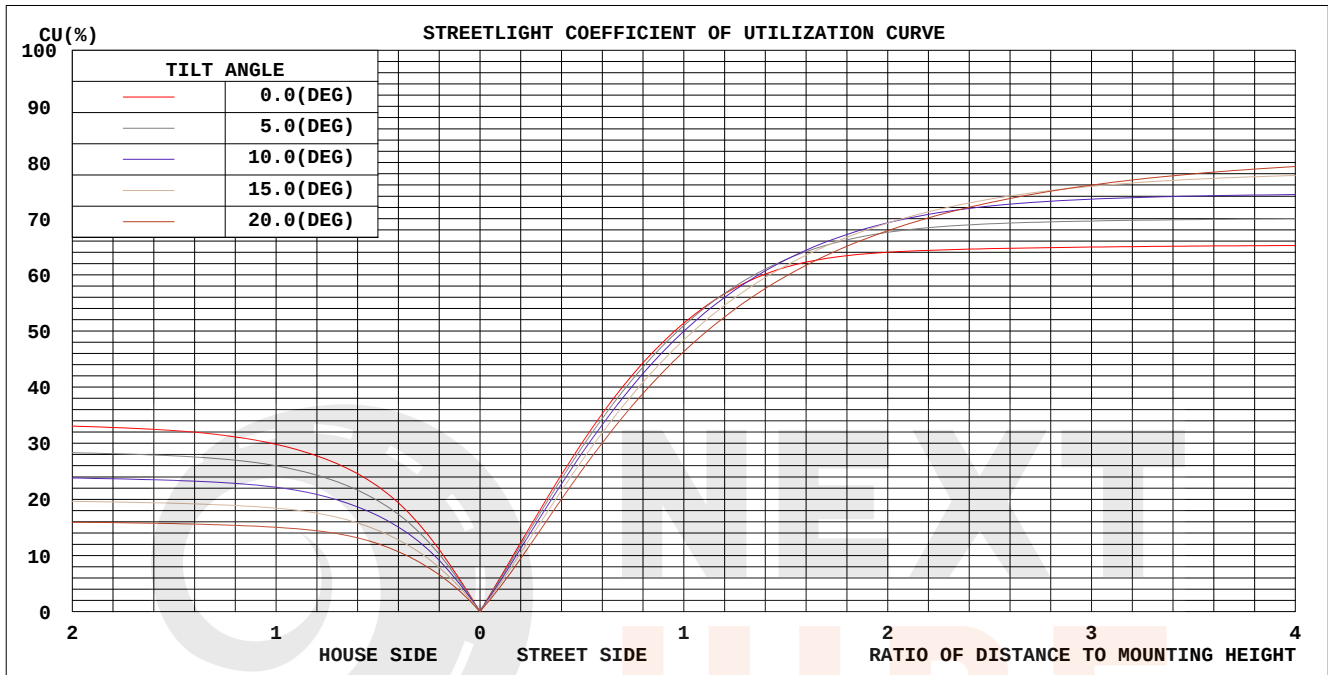

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.9DEG
Operators: Link Chai
Test Date: 2022-01-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.0.362
Humidity: 60%
Test Distance: 26.000m [K=1.4587]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:45.25V I:2.209A P:99.97W PF:1.000 Freq:0Hz Lamp Flux:16987.6x1 lm		
NAME: All in one solar street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	4666	4872	4883	4807	4579	4191	3970	4239	0- 10	435.0	435.0	2.56,2.56
20	4868	5155	5054	5008	4678	3572	2908	3673	10- 20	1260	1695	9.98,9.98
30	5303	5629	5272	5369	4938	2696	2045	2874	20- 30	1991	3685	21.7,21.7
40	6073	6172	5206	5825	5557	1979	1678	2186	30- 40	2721	6406	37.7,37.7
50	6542	6198	4451	5891	5964	1595	1376	1740	40- 50	3348	9754	57.4,57.4
60	6803	5142	1547	4996	6297	989.6	703.9	1082	50- 60	3490	13244	78,78
70	4633	1386	433.5	1366	4373	379.4	362.5	396.3	60- 70	2558	15802	93,93
80	585.0	249.9	241.2	240.3	604.6	182.4	216.9	189.2	70- 80	990.1	16792	98.8,98.8
90	23.31	33.31	36.75	28.77	23.94	16.45	2.087	21.04	80- 90	158.8	16951	99.8,99.8
100	6.489	1.733	1.464	1.304	4.393	3.670	2.121	2.853	90-100	6.530	16957	99.8,99.8
110	7.385	1.245	0.9763	0.7760	7.307	8.356	11.51	6.232	100-110	4.182	16961	99.8,99.8
120	8.848	1.245	0.9763	0.7325	7.385	10.48	19.45	7.569	110-120	6.063	16967	99.9,99.9
130	8.927	2.245	0.9763	0.9766	6.167	9.756	11.72	6.998	120-130	5.429	16973	99.9,99.9
140	8.035	3.452	1.788	2.032	5.600	9.319	6.590	6.921	130-140	4.243	16977	99.9,99.9
150	8.035	5.661	3.494	3.943	6.494	10.37	8.057	7.652	140-150	3.845	16981	100,100
160	8.035	6.385	5.288	4.513	7.954	11.00	10.09	8.593	150-160	3.412	16984	100,100
170	9.331	9.673	7.475	6.751	8.767	11.36	9.922	9.319	160-170	2.351	16987	100,100
180	10.88	11.77	9.341	7.894	10.88	11.73	9.275	8.871	170-180	0.9157	16988	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.9DEG
 Operators:Link Chai
 Test Date:2022-01-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.0.362
 Humidity:60%
 Test Distance:26.000m [K=1.4587]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:45.25V I:2.209A P:99.97W PF:1.000 Freq:0Hz Lamp Flux:16987.6x1 lm		
NAME: All in one solar street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

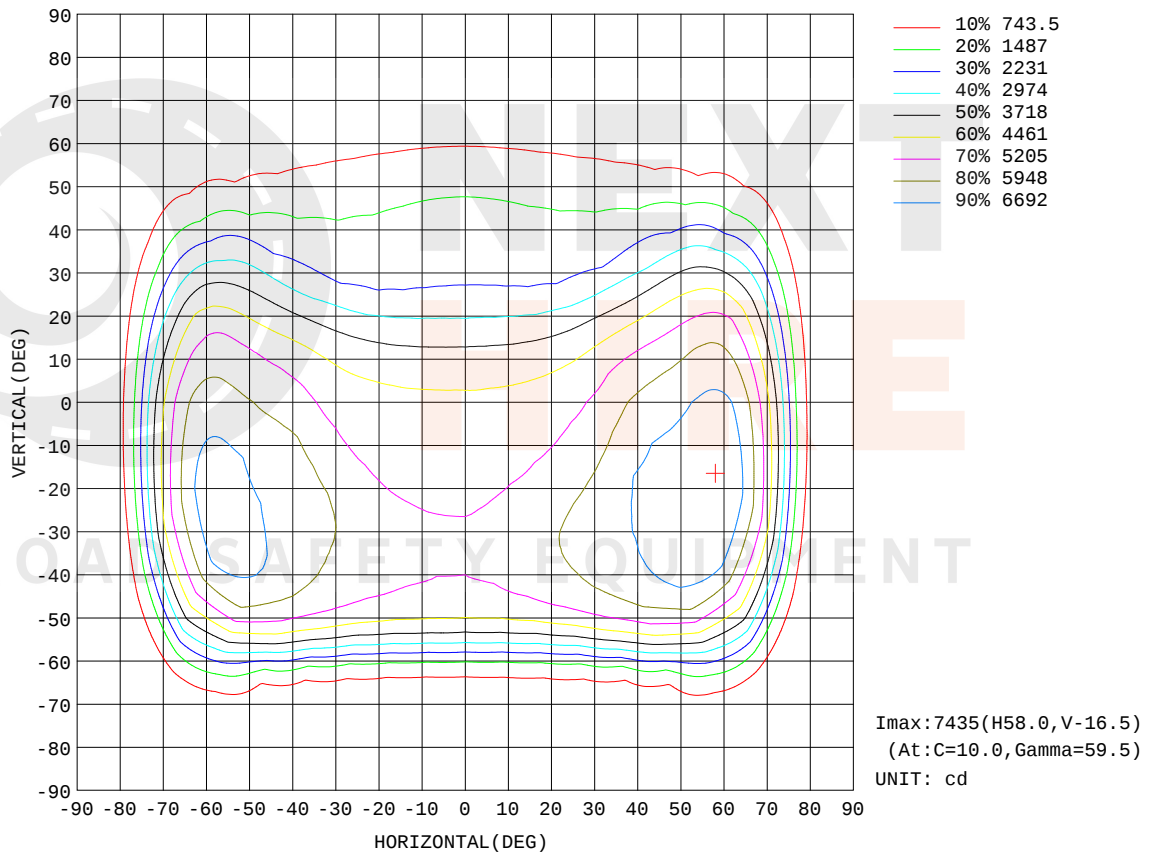

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.9DEG
Operators: Link Chai
Test Date: 2022-01-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.0.362
Humidity: 60%
Test Distance: 26.000m [K=1.4587]
Remarks:

Planar Illuminance Curve

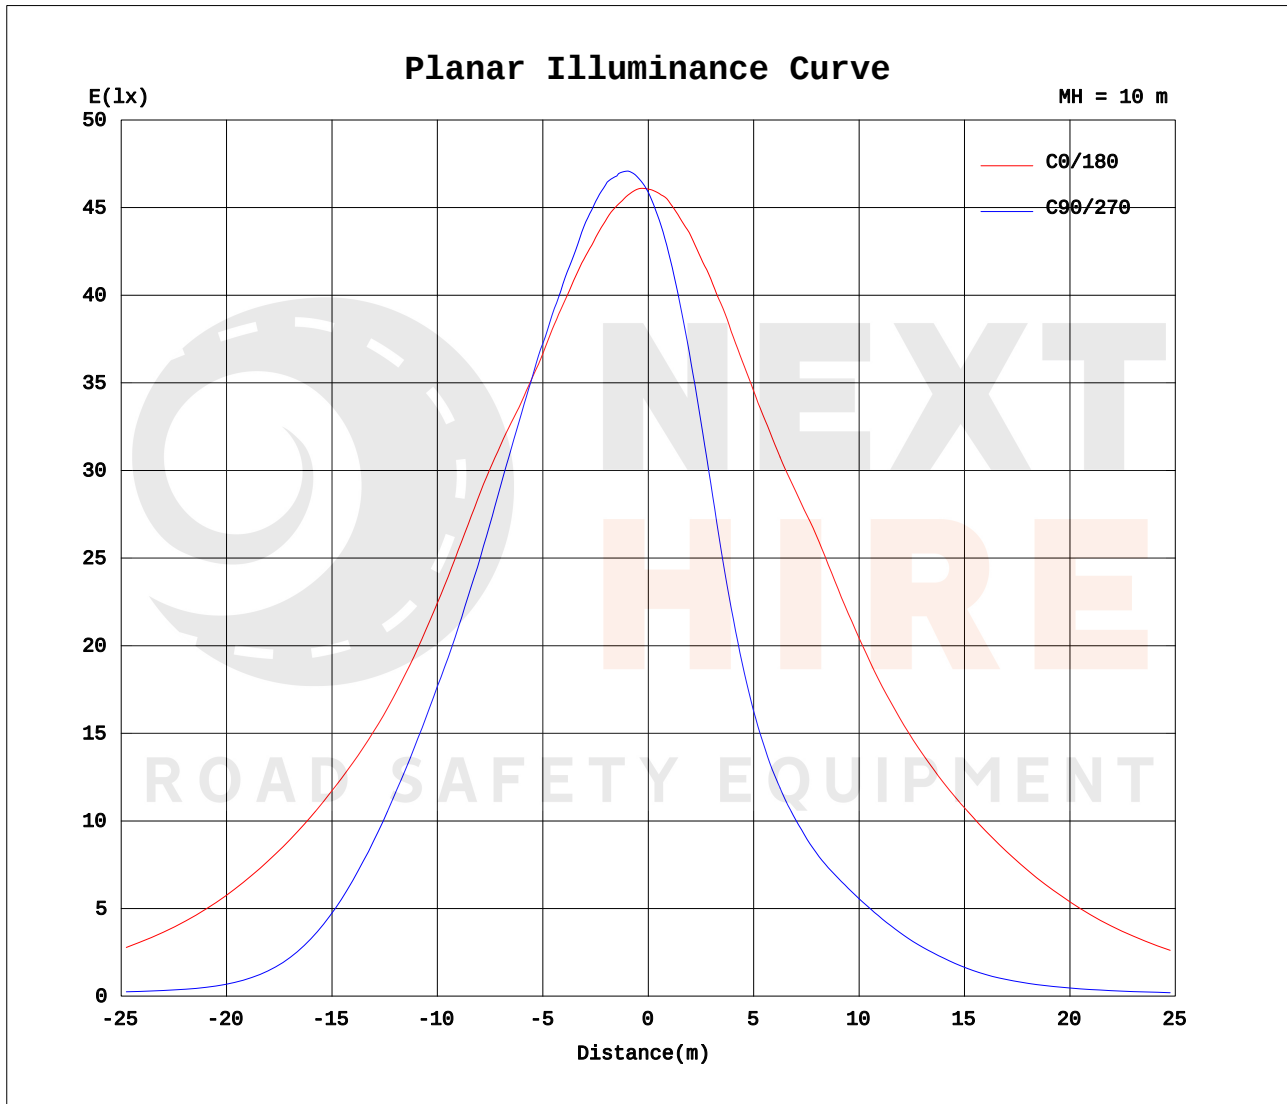


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.9DEG
Operators: Link Chai
Test Date: 2022-01-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.0.362
Humidity: 60%
Test Distance: 26.000m [K=1.4587]
Remarks:

LCS REPORT

Test:U:45.25V I:2.209A P:99.97W PF:1.000 Freq:0Hz Lamp Flux:16987.6x1 lm		
NAME: All in one solar street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

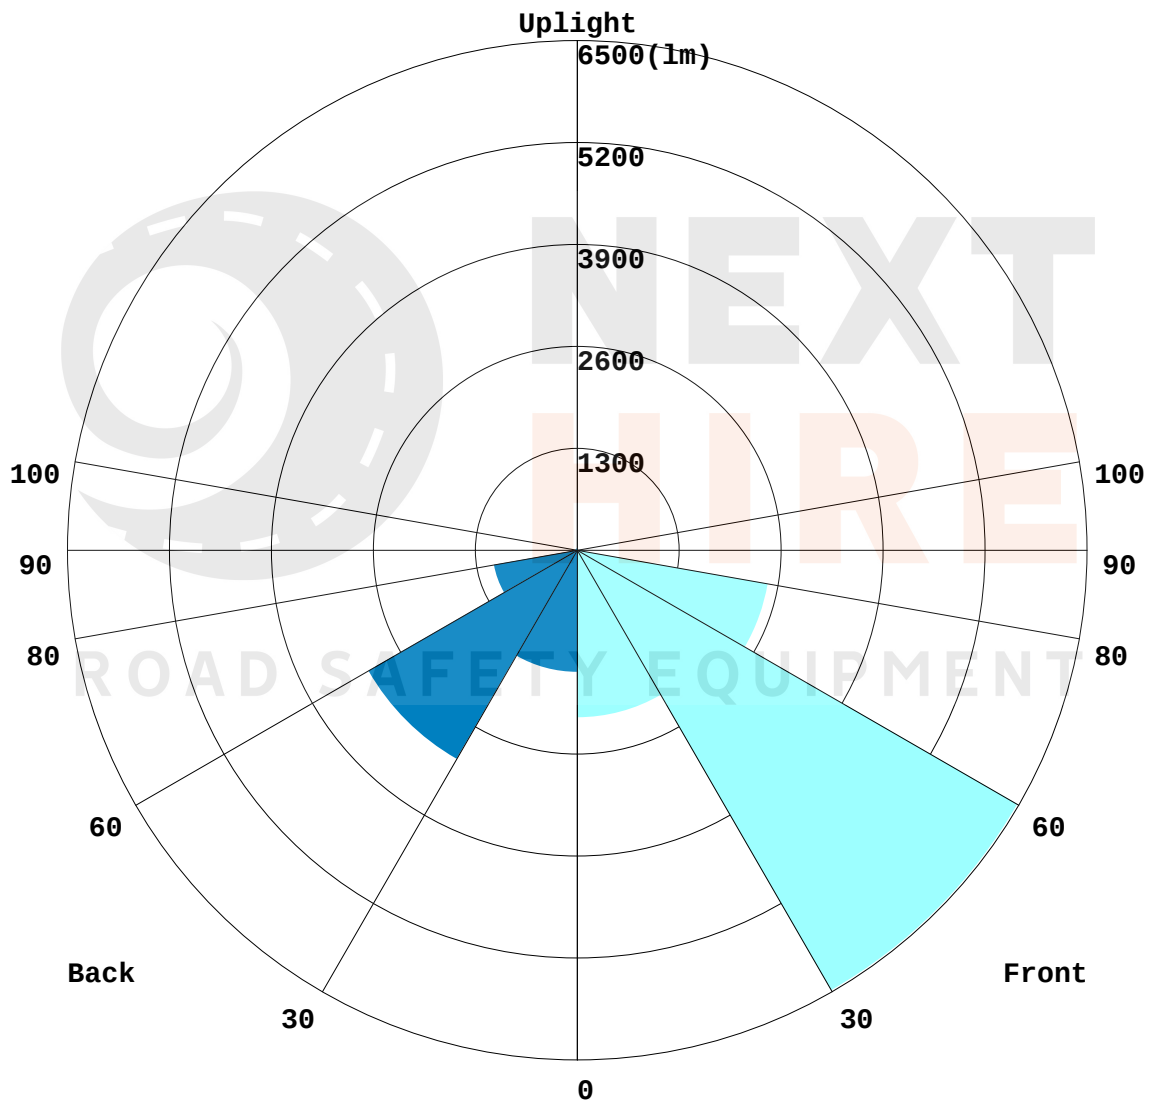

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.9DEG
 Operators:Link Chai
 Test Date:2022-01-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.0.362
 Humidity:60%
 Test Distance:26.000m [K=1.4587]
 Remarks:

BUG REPORT

Test:U:45.25V I:2.209A P:99.97W PF:1.000 Freq:0Hz Lamp Flux:16987.6x1 lm		
NAME: All in one solar street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	2131.8	12.5
FM - Front-Medium(30-60)	6482.2	38.2
FH - Front-High(60-80)	2469.9	14.5
FVH - Front-Very High(80-90)	93.664	0.6
Total Forward Light	11190	65.9

BL - Back-Low(0-30)	1553.3	9.1
BM - Back-Medium(30-60)	3076.3	18.1
BH - Back-High(60-80)	1078.3	6.3
BVH - Back-Very High(80-90)	65.115	0.4
Total Back Light	5797.6	34.1

UL - Uplight-Low(90-100)	6.53	0.0
UH - Uplight-High(100-180)	30.44	0.2
Total Up Light	36.97	0.2

BUG(Back,Up,Glare) Rating	B3-U2-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	5773	24.579	5797.6
Street Side	11178	12.391	11190


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.9DEG
 Operators:Link Chai
 Test Date:2022-01-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.0.362
 Humidity:60%
 Test Distance:26.000m [K=1.4587]
 Remarks:

ROAD ISOCANDELA REPORT

Test:U:45.25V I:2.209A P:99.97W PF:1.000 Freq:0Hz Lamp Flux:16987.6x1 lm		
NAME: All in one solar street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

ROAD SURFACE ISOCANDELA DIAGRAM

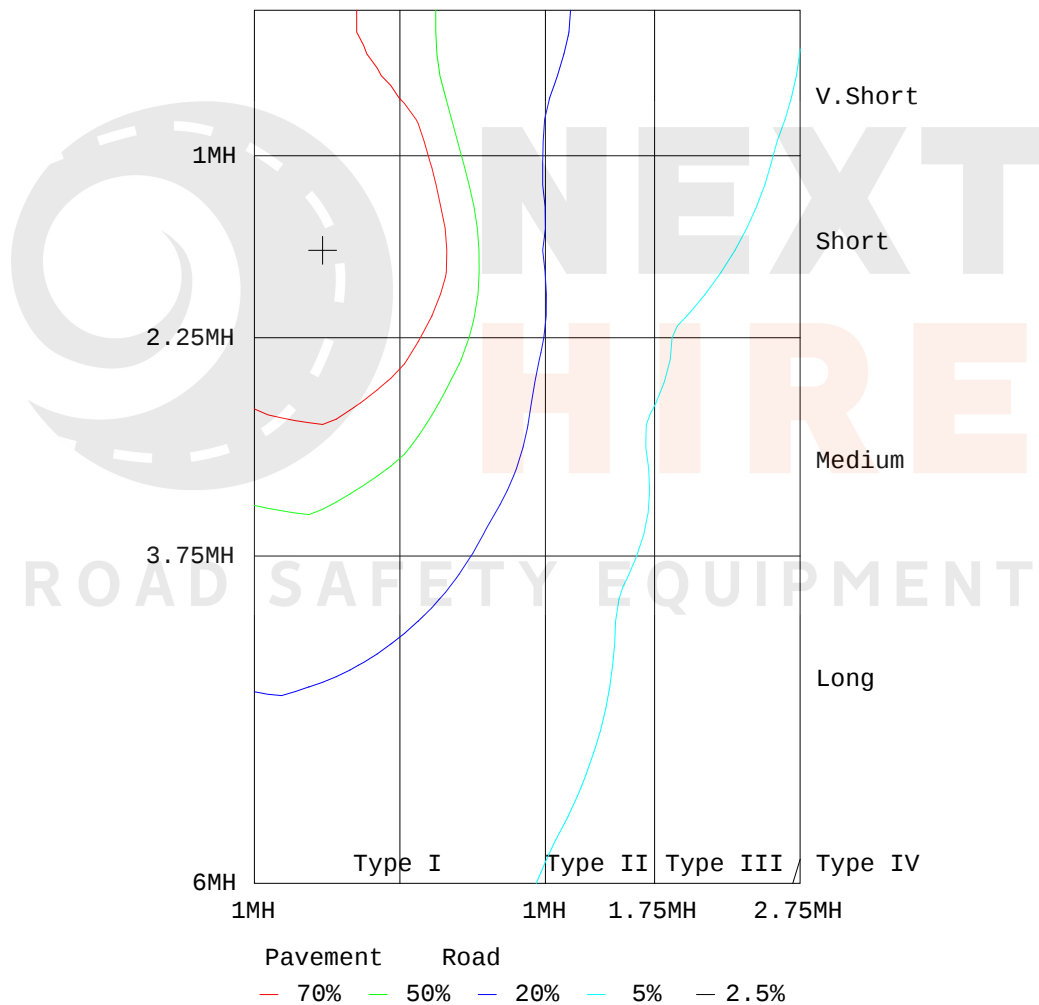

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 24.9DEG
 Operators: Link Chai
 Test Date: 2022-01-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.0.362
 Humidity: 60%
 Test Distance: 26.000m [K=1.4587]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:45.25V I:2.209A P:99.97W PF:1.000 Freq:0Hz Lamp Flux:16987.6x1 lm																			
NAME: All in one solar street light										TYPE:LED					WEIGHT:N/A				
SPEC.:N/A										DIM.:					SERIAL No.:N/A				
MFR.:										SUR.:					Shielding Angle:N/A				

Table--1

UNIT: cd

C(DEC) γ (DEC)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588
5	4614	4659	4675	4699	4710	4753	4754	4757	4753	4761	4754	4741	4733	4702	4696	4680	4648	4605	4586
10	4666	4743	4776	4826	4854	4890	4903	4898	4885	4883	4876	4863	4845	4816	4798	4757	4713	4656	4579
15	4737	4844	4906	4956	4983	5020	5022	5013	4998	4981	4974	4956	4944	4913	4901	4849	4793	4728	4606
20	4868	5004	5053	5128	5151	5159	5143	5119	5090	5054	5050	5043	5038	5010	5006	4980	4910	4807	4678
25	5046	5188	5273	5318	5353	5343	5312	5268	5216	5168	5173	5165	5160	5145	5155	5130	5061	4962	4763
30	5303	5498	5573	5626	5646	5613	5534	5431	5344	5272	5280	5293	5338	5358	5381	5370	5308	5190	4938
35	5698	5954	6048	6070	6024	5891	5711	5519	5384	5298	5311	5374	5475	5586	5703	5746	5700	5571	5217
40	6073	6444	6546	6476	6292	6051	5764	5490	5294	5206	5226	5347	5508	5710	5942	6121	6153	6009	5557
45	6323	6712	6779	6652	6401	6069	5675	5318	5083	5003	5041	5190	5436	5738	6049	6317	6405	6289	5758
50	6542	6925	6960	6784	6441	5956	5376	4862	4541	4451	4560	4783	5166	5660	6124	6485	6628	6543	5964
55	6793	7252	7215	6914	6342	5539	4585	3803	3348	3212	3385	3805	4481	5312	6080	6674	6955	6893	6214
60	6803	7405	7391	6826	5839	4445	2995	2105	1670	1547	1687	2122	2963	4331	5661	6677	7187	7099	6297
65	6114	6933	7000	6144	4458	2408	1203	783	638	604	629	769	1206	2373	4388	6070	6839	6630	5720
70	4633	5583	5521	4271	2051	721	497	459	438	433	432	443	478	720	2012	4281	5456	5339	4373
75	2286	3305	3260	1841	527	361	340	326	323	323	320	320	328	347	504	1835	3249	3148	2215
80	585	754	688	429	262	238	227	228	238	241	236	225	221	227	254	414	715	766	605
85	219	235	231	184	137	128	127	125	126	127	126	123	122	120	127	174	227	234	215
90	23.3	34.9	37.6	35.3	33.5	33.1	33.3	34.8	37.3	36.7	36.5	33.2	30.4	28.4	29.2	31.6	33.8	30.4	23.9
95	6.42	6.11	6.16	5.31	4.17	3.00	2.27	2.04	1.95	1.95	2.04	2.04	1.89	2.12	3.10	4.91	6.00	5.84	3.65
100	6.49	5.04	3.46	2.57	1.92	1.54	1.30	1.30	1.38	1.46	1.31	1.38	1.22	1.30	1.31	1.80	2.45	3.04	4.39
105	7.46	5.19	3.22	2.08	1.36	1.13	1.13	0.98	1.06	1.14	1.06	1.06	0.90	0.90	0.98	1.15	1.63	2.71	6.10
110	7.39	5.20	3.22	2.08	1.36	1.13	1.05	0.98	0.98	0.98	0.97	0.81	0.74	0.74	0.81	1.06	1.63	2.71	7.31
115	8.27	6.17	3.87	2.08	1.36	1.13	1.05	0.98	0.98	0.98	0.90	0.73	0.73	0.65	0.81	1.06	1.63	2.71	7.39
120	8.85	6.58	4.35	2.56	1.36	1.13	1.05	0.98	0.98	0.98	0.90	0.73	0.73	0.65	0.81	1.06	1.71	2.87	7.39
125	9.17	6.99	4.59	2.96	1.76	1.29	1.13	0.98	0.98	0.98	0.90	0.73	0.73	0.65	0.98	1.54	2.59	3.86	6.49
130	8.93	7.85	5.64	3.77	2.56	1.93	1.30	1.30	1.13	0.98	0.90	0.73	0.73	0.65	1.30	1.63	2.69	4.19	6.17
135	8.69	7.88	5.80	4.17	3.28	2.50	1.70	1.46	1.38	1.22	1.30	1.30	1.22	1.30	1.55	2.20	3.01	4.19	5.60
140	8.03	7.48	5.80	5.04	3.84	3.06	2.59	2.03	1.79	1.79	1.71	1.79	1.71	1.95	2.11	2.69	3.83	4.76	5.60
145	8.03	7.48	6.61	5.77	5.12	4.27	3.65	2.93	2.52	2.52	2.44	2.52	2.52	2.77	2.93	3.17	3.92	5.25	5.76
150	8.03	7.63	6.93	6.65	6.08	5.24	4.53	3.90	3.74	3.49	3.41	3.25	3.42	3.82	4.06	3.99	4.32	5.33	6.49
155	8.03	7.72	7.17	6.97	6.49	5.80	5.10	4.47	4.23	4.15	4.15	3.98	3.99	4.07	4.40	4.49	4.57	5.33	7.23
160	8.03	7.80	7.25	6.97	6.57	6.21	5.51	5.21	5.28	5.29	5.21	5.21	4.72	4.55	4.48	4.49	4.73	5.42	7.95
165	8.35	8.13	8.14	8.09	7.84	7.32	7.43	6.34	6.35	6.34	6.03	5.94	6.34	5.45	5.37	5.22	5.30	5.50	8.20
170	9.33	9.34	9.66	10.1	9.52	9.83	10.4	7.81	7.65	7.47	7.25	7.57	7.90	6.83	6.67	6.44	6.45	6.57	8.77
175	10.8	11.2	11.5	11.8	11.4	11.8	12.4	9.19	8.95	8.62	8.30	9.12	9.12	7.81	7.66	7.67	7.58	7.80	10.6
180	10.9	11.5	11.8	11.9	11.4	12.1	13.5	9.52	9.20	9.34	8.96	10.1	9.61	8.05	7.73	7.75	7.75	7.88	10.9

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:Link Chai
Test Date:2022-01-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.0.362
Humidity:60%
Test Distance:26.000m [K=1.4587]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:45.25V I:2.209A P:99.97W PF:1.000 Freq:0Hz Lamp Flux:16987.6x1 lm																		
NAME: All in one solar street light									TYPE:LED					WEIGHT:N/A				
SPEC.:N/A									DIM.:					SERIAL No.:N/A				
MFR.:									SUR.:					Shielding Angle:N/A				

Table--2

UNIT: cd

C (DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588	4588		
5	4545	4507	4464	4425	4403	4372	4349	4344	4336	4351	4359	4389	4415	4460	4502	4537	4576		
10	4507	4420	4326	4228	4153	4075	4017	3984	3970	3998	4035	4108	4188	4290	4399	4493	4584		
15	4487	4341	4163	3987	3822	3684	3572	3505	3490	3525	3606	3738	3892	4081	4278	4450	4620		
20	4497	4266	3993	3705	3439	3195	3034	2940	2908	2962	3069	3265	3519	3827	4149	4429	4679		
25	4534	4202	3807	3364	2958	2656	2494	2426	2405	2440	2531	2729	3058	3522	4010	4445	4795		
30	4629	4177	3598	2952	2438	2181	2084	2053	2045	2067	2116	2250	2576	3171	3877	4511	4998		
35	4823	4178	3368	2528	2047	1875	1830	1826	1828	1838	1871	1954	2181	2796	3739	4606	5304		
40	4996	4162	3083	2161	1795	1695	1670	1675	1678	1681	1692	1762	1935	2436	3533	4650	5551		
45	5110	4058	2759	1903	1646	1557	1549	1570	1574	1570	1562	1610	1754	2153	3272	4616	5694		
50	5192	3916	2460	1714	1476	1396	1369	1374	1376	1379	1379	1421	1565	1916	2980	4539	5799		
55	5274	3706	2152	1487	1227	1104	1078	1074	1073	1080	1095	1141	1298	1635	2607	4349	5893		
60	5125	3267	1722	1107	872	757	709	706	704	704	716	786	936	1228	2055	3849	5737		
65	4354	2412	1122	669	531	494	477	472	474	475	482	503	558	740	1342	2816	4842		
70	2845	1311	543	384	375	366	359	361	363	361	359	374	383	410	635	1564	3244		
75	1194	505	307	270	271	280	278	285	289	281	278	283	276	287	339	611	1360		
80	383	237	186	179	186	195	202	214	217	211	202	197	191	187	204	273	432		
85	164	112	91.1	85.5	85.8	85.7	90.7	91.5	91.0	94.9	98.2	92.0	95.2	97.4	105	132	190		
90	23.2	20.0	18.1	18.4	14.5	10.7	6.10	2.43	2.09	3.96	8.75	13.3	19.2	22.9	23.7	27.3	31.5		
95	4.14	4.12	3.37	2.33	1.53	1.46	1.31	1.47	1.38	1.38	1.15	1.14	1.38	2.13	3.19	4.07	4.73		
100	5.69	6.21	5.54	4.18	3.16	2.52	2.20	2.30	2.12	2.04	1.55	1.55	2.20	3.51	4.74	5.22	4.85		
105	7.65	8.30	7.70	6.25	5.89	5.53	5.64	6.29	5.40	5.15	3.26	2.94	3.92	5.38	6.62	7.02	6.33		
110	8.95	9.59	9.14	8.17	8.54	9.34	11.4	13.5	11.5	10.8	5.96	5.05	5.62	6.84	7.92	8.32	7.47		
115	9.18	10.3	10.3	9.62	10.7	12.3	15.5	18.5	15.7	14.5	8.56	6.68	6.92	7.57	7.99	8.24	7.55		
120	9.10	10.1	10.2	10.2	10.8	13.6	15.6	20.0	19.4	15.6	9.69	8.22	7.57	7.57	7.99	8.08	7.39		
125	7.80	9.02	9.77	8.81	10.8	12.9	12.2	14.8	16.6	12.1	7.41	8.14	7.65	6.68	7.34	6.61	5.91		
130	6.82	7.40	7.85	8.81	10.7	10.2	15.0	11.0	11.7	10.5	9.45	8.06	7.48	6.51	5.87	5.79	5.33		
135	6.26	6.85	7.77	8.49	9.91	8.51	13.9	6.34	7.60	8.87	11.3	7.33	7.32	6.43	5.79	5.38	4.92		
140	6.26	6.85	7.77	8.41	10.2	11.1	12.8	6.27	6.59	7.00	14.2	7.58	7.41	6.43	5.79	5.38	4.93		
145	6.34	6.93	7.94	8.97	10.2	14.1	9.27	6.68	7.08	7.09	14.2	8.80	7.65	6.76	5.79	5.38	5.09		
150	7.07	7.74	9.14	10.1	10.6	16.6	9.27	7.74	8.06	7.99	14.2	10.4	7.97	7.33	6.44	5.72	5.42		
155	7.97	8.79	10.1	11.0	11.0	16.7	9.92	9.04	9.12	8.97	14.3	11.6	8.38	7.98	7.09	6.53	5.99		
160	8.45	9.11	10.0	11.0	11.0	16.6	11.4	9.61	10.1	9.77	13.9	12.6	9.04	8.14	7.67	6.86	6.41		
165	8.45	9.11	10.0	11.0	11.1	14.8	13.9	9.61	10.0	9.69	11.4	12.6	10.5	8.14	7.75	7.34	6.89		
170	8.94	9.51	10.3	11.2	11.5	13.1	14.3	9.61	9.92	9.69	9.53	11.9	10.5	8.14	7.75	7.75	7.14		
175	10.5	11.0	11.5	12.0	11.5	12.6	14.3	9.36	9.60	9.45	9.12	10.8	10.3	8.14	7.75	7.75	7.80		
180	10.9	11.4	11.7	11.9	11.5	12.3	13.5	9.36	9.28	9.12	9.12	10.1	9.76	7.98	7.75	7.75	7.80		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:24.9DEG
Operators:Link Chai
Test Date:2022-01-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.0.362
Humidity:60%
Test Distance:26.000m [K=1.4587]
Remarks: